

Features

- High efficiency up to 96%
- THD <15%
- Output current adjusted via a DIP switch and slightly adjusted via a potentiometer
- CCT adjustable via a DIP switch (optional)
- 3 versions: non-dimmable, 3-in-1 dimming and 3-in-1 dimming + 12V AUX power supply
- Dim to off without afterglow (optional and for YA series only)
- Flicker free
- Surge protections: L-N: 6kV & L/N-GND: 6kV
- All-round protections: over voltage protection and short circuit protection
- IP65



Applications


- High bay light

Descriptions

LF-FHB150YA/YB/YCIV 5 is a constant current LED driver. It has features of high efficiency, high PF and low THD. There is a potentiometer and a DIP switch at the side of LED driver used for adjusting the output current (power) of LED drivers and CCT of luminaires.

Product Model

LF - FHB 150 YA / YC / YB IV 5

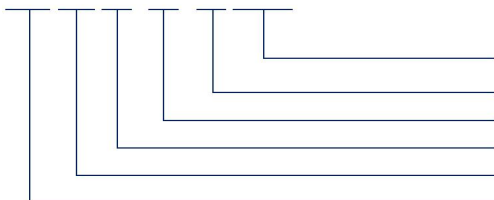

- IV 5: serial number for product upgrade and iteration
- YB: non-dimmable version
- YC: 3-in-1 dimming version
- YA: 3-in-1 dimming + 12V version
- 150: rated power: 150W
- F: non-isolated design; HB: for high bay light

Lifud Technology Co., Ltd.

Production Base I (HQ): Building B, Kutto Industrial Park, No.26, Xinhe Road, Bao'an District, Shenzhen City, China.
 Production Base II: No.4, Block 2, Tengfei Road, Shigao Economic Development Area, Meishan City, Sichuan, China.
 Website: www.lifud.com Telephone: +86(0)755 8373 9299 Email: sales@lifud.com

■ Electrical Characteristics

Model			LF-FHB150YAIV 5		LF-FHB150YBIV 5		LF-FHB150YCIV 5	
Output	Adjustable Output Current (Typical Value @220Vdc)		DIP switch + potentiometer to precisely adjust the output current/power (370-750mA; default setting: 620mA±5%)					
			370mA	LOW	500mA	MID	620mA	HIGH
	Changeable CCT Two-Channel Output (one LED+)		Adjustable via a DIP switch (optional)					
			Channel A		Channel A+B		Channel B	
	Output Voltage		180-260Vdc (LED)					
	Output Power		150W max. @120-277Vac					
	Startup Time		120Vac <1S; 230Vac <0.5S					
	Linear Adjustment Rate		±5% @full load					
	Load Adjustment Rate		±8% @full load					
	Temperature Drift		±3% @240Vdc/620mA Tc: 25~75°C					
Input	Input Voltage		US-Standard: 100-277Vac; EU-Standard (optional): 100-240Vac					
	DC Input Voltage		141-276Vdc					
	Input Current		2.0A max.					
	PF		≥0.95/230Vac @full load					
	THD		≤15% @full load					
	Efficiency	MIN	91%/120Vac @240Vdc/620mA; 93.5%/230Vac @240Vdc/620mA					
		TYP	93%/120Vac @240Vdc/620mA; 95.3%/230Vac @240Vdc/620mA					
		MAX	/					
	Inrush Current		<80A/350uS @230Vac					
Standby Power Consumption		≤0.5W @220Vac/50Hz (dim to off)						
12V AUX Power Supply (For YA Series)	Output Voltage		+12Vdc (11-14V)					
	Output Current		200mA max.					
	Dynamic Load		Please make sure that it matches for the LED driver.					
	Ripple Voltage		≤1V					
Protections	Surge		L-N: 6kV (2Ω), L/N-PE: 6kV (12Ω)					
	Open Circuit		Open circuit voltage ≤310Vdc					
	Short Circuit		≤15W (The LED driver will recover by itself and will not be damaged even in the state of short circuit for a long time.)					
	Grounding Resistance		≤0.1Ω @25A/60S					
	Insulation Resistance		≥100MΩ @I/P-PE O/P-PE: 500Vdc/60S/25°C/50%RH					

■ Electrical Characteristics


Environment Descriptions	Operating Temperature	Tc: -40°C~+90°C
	Operating Humidity	0~95%RH (without condensation)
	Storage Temperature/ Humidity	-40°C~+80°C (6 months in Class I environment); 0-95%RH (without condensation)
	Atmospheric Pressure	86~106kPa
Safety and EMC	Certifications 1	FCC, UL
	Certifications 2 (optional)	TUV-ENEC, CE, RCM, SAA, CB
	Withstanding Voltage	L-N/PG: 1.5kVac, <5mA, 60S; L-N/DIM: 3kVac, <5mA, 60S; DIM/PG: 500Vac, <5mA, 60S
	Safety Standards	ENEC: EN61347-1: 2015, EN61347-2-13: 2014/A1: 2017, EN62384: 2016/A1 2009 UL: UL8750, CSA 250.13 CE-LVD: EN 61347-2-13: 2014/A1: 2017, EN 61347-1: 2015, EN 62493: 2015 CB: IEC 61347-1: 2015, IEC61347-2-3: 2014, IEC 61347-2-13: 2014/AMD1: 2016 SAA: AS 61347.2-13: 2018 RCM: AS 61347.2-13: 2018
	EMI	FCC: PART 15 CLASS B @120Vac FCC: PART 15 CLASS A @277Vac CE-EMC/RCM: EN55015, EN61000-3-2, EN61000-3-3
	EMS	Complies with IEC61000-4-2, 3, 4, 5, 6, 8, 11, 12; IEC61547 CE-EMC/RCM: EN61000-4-2, 3, 4, 5, 6, 11
	Ringing Wave	4kV
	ESD	Air 8kV, touch 4kV
Other Parameters	IP Rating	IP65
	RoHS	RoHS 2.0 (EU) 2015/863
	Warranty Condition	5 years (Tc ≤85°C)
	MTBF	> 1000Khours@Telcordia SR-332 Issue4
Testing Equipment	Digital power meter: CHROMA66202, oscilloscope: Tektronix DPO3014, DC electronic load: M9712B, LED board, constant temperature and humidity chamber; Everfine EMS61000-5B: Everfine EMS61000-4A, spectroanalyzer: KH3935, withstanding voltage tester: TH9201B, etc.	

■ Electrical Characteristics


Testing Remarks	The above parameters are tested at the ambient temperature of 25°C, humidity of 50%, full load and input voltage of 230Vac without any special remarks.
Additional Remarks	<ol style="list-style-type: none"> 1. It is recommended that user install over voltage protection, under voltage protection and surge protection devices in the power supply circuits of light fixtures to ensure electricity safety. 2. The PC cover, casing and end cap for assembling the LED driver in the light fixture must meet the fire rating of UL94-V0 or above. 3. The LED driver used in combination with the end device is one of the accessories in the whole light fixture, and its EMC is not only susceptible to the driver itself, but to the LED light fixture and the whole light fixture's wiring. Thus, the manufacturer of LED light fixture should re-confirm the EMC performance of LED driver before the whole light fixture is finished. 4. It is suggested that user use a slotted screwdriver or a Philips to adjust the output current of LED driver, otherwise the potentiometer may be damaged. (The screwdriver should have good insulation at the head, body and handle, and the screwdriver with a 2mm head is recommended as well. What's more, please pay attention that the intensity of torque not exceed 500g.cm) 5. When using the LED driver, please pay attention that the total output power not exceed the maximum rated output power, otherwise the warranty service of LED driver would be failed. 6. When conducting withstanding voltage test on LED driver, please short-circuit the input wire L and N; the positive electrode and negative electrode of the output wire; the positive electrode and negative electrode of the dimming wire and AUX power supply. 7. Please fully inspect the withstanding voltage ability of LED beads and aluminum substrates and the value shall be > 2.5kVac.

■ Product Characteristic Curves


PF Curve

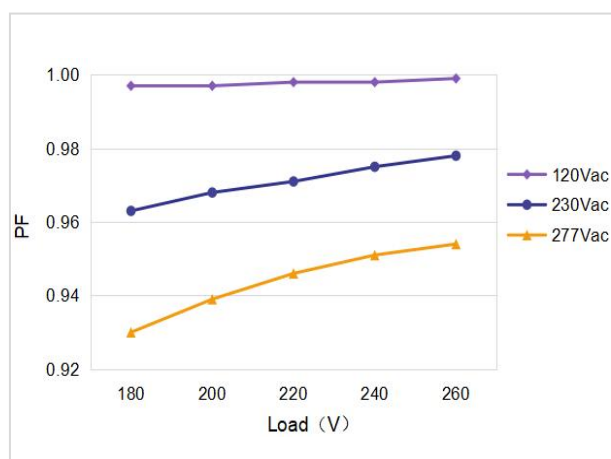


Efficiency Curve

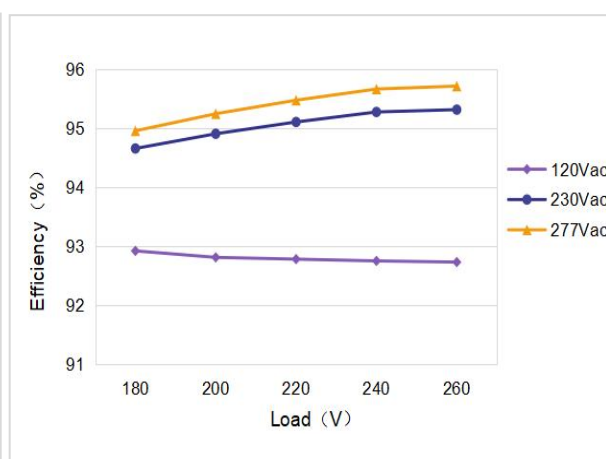


Load Derating Curve

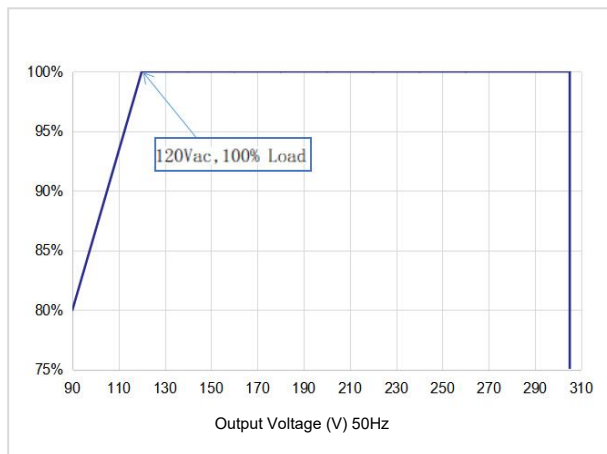

Power Curve

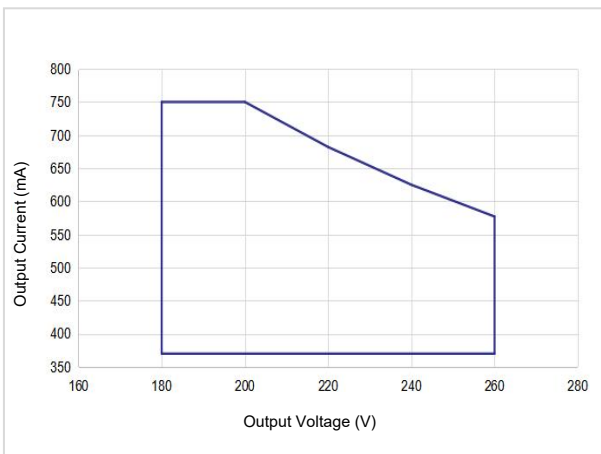

Lifetime Curve

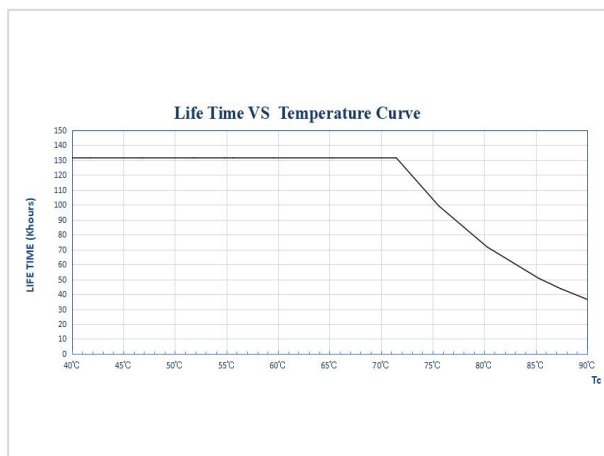


■ Dimming Operation Instructions

0-10V Dimming Operation


- Connect 0-10V signal to DIM terminal.
- In 0-10V dimming mode, when the input voltage is $0.8V \pm 0.15$, the light turns off. When it's $1.0V \pm 0.15$, the light turns on.
- Dimming depth: 10% (typical value)
- DIM+/- (without signal connected): 100% rated current output

Wiring Diagram of 0-10V Dimming

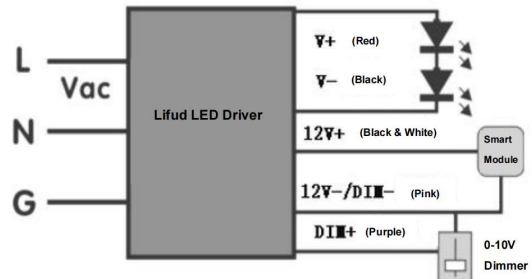

This diagram is only for YA series; YC series has no 12V+; YB series has no 12V+, DIM+ or 12V-/DIM-.

Dimming Curve

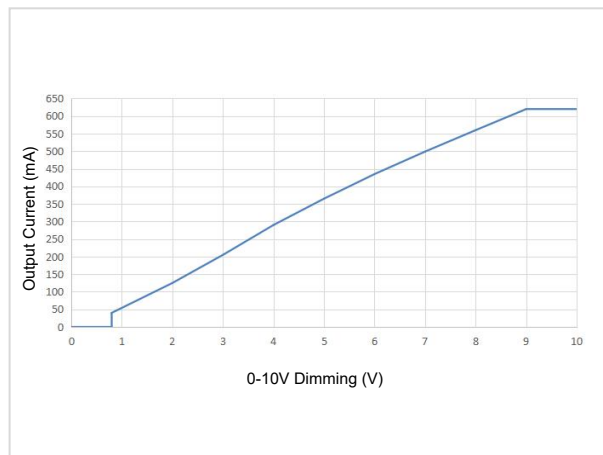


Input: 230Vac, output: 242Vdc/620mA (this data is measured by Lifud 0-10V dimmer and the chart is for reference only)

PWM Dimming Operation


- Connect PWM signal to the DIM terminal.
- Dimming depth: 10% (typical value)
- Compatible signal range: 1000-3000(Hz), amplitude: 9-10(V)
- DIM+/- (without signal connected): 100% rated current

Wiring Diagram of PWM Dimming

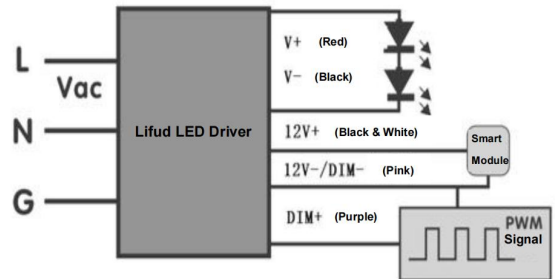

This diagram is only for YA series; YC series has no 12V+; YB series has no 12V+, DIM+ or 12V-/DIM-.

Dimming Curve

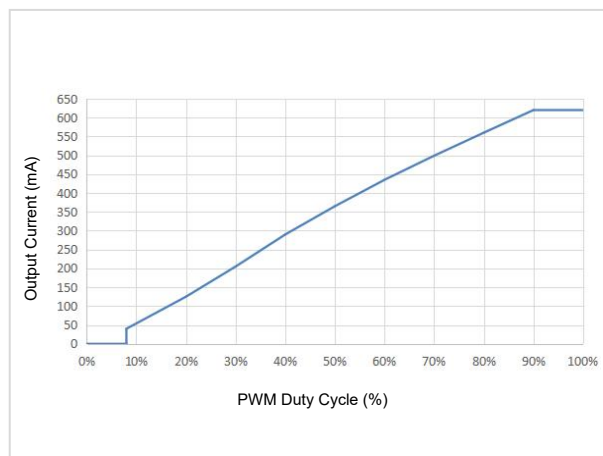


Input: 230Vac, output: 242Vdc/620mA (this data is measured by Lifud PWM signal generator RIGOL and the chart is for reference only)

Rx Dimming Operation

- Connect Rx signal to the DIM terminal.
- Range: 0-100K Ω
- DIM+/- (without signal connected): 100% rated current

Wiring Diagram of Rx Dimming

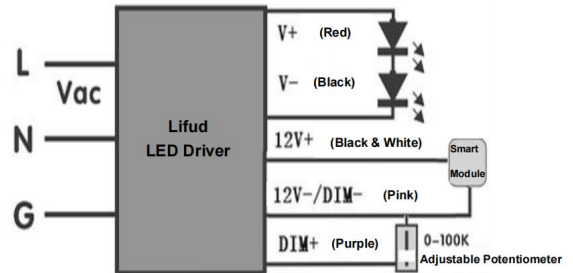

This diagram is only for YA series; YC series has no 12V+; YB series has no 12V+, DIM+ or 12V-/DIM-.


Dimming Curve



Input: 230Vac, output: 242Vdc/620mA (The data is measured by resistance dimmer and the chart is for reference only)

Dim-to-off "Without Afterglow" Operation

The dim-to-off without afterglow version of YA series is optional. If the other with afterglow versions need to be dimmed to off without afterglow, please refer to the following operation: when the dimming signal is 0V, the LED driver has no output, but there exists junction capacitance between the aluminum substrate's copper foil and the grounding wire, which will make the LED beads glow slightly. Thus, it is necessary to respectively attach a resistor to every node of LED beads in parallel, and the resistance should match for the parameters of aluminum substrate and LED beads. (reference resistance: 3-5K Ω /size: 1206)

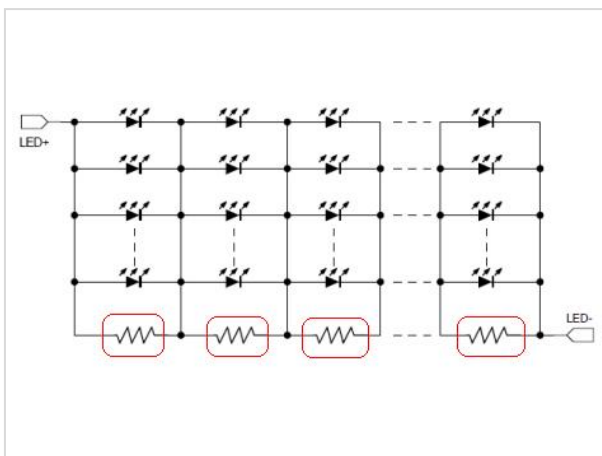




■ Structure & Dimensions (unit: mm)

Wire Specifications



Type	Input Wire Specification	Output Wire Specification 1	Output Wire Specification 2 CCT Changeable via a DIP Switch (optional)	Dimming Wire & AUX Power Supply Wire
US-Standard	3*18AWG Φ 7.8 \pm 1mm	2*18AWG Φ 7.7 \pm 1mm	3*18AWG Φ 7.7 \pm 1mm	YA: 3*22AWG Φ 5.0 \pm 1mm YC: 2*22AWG Φ 4.5 \pm 1mm
EU-Standard (optional)	3*1.0mm ² Φ 7.2 \pm 1mm	2*1.0mm ² Φ 6.8 \pm 1mm	3*1.0mm ² Φ 7.2 \pm 1mm	
Color (US-Standard)	AC-L Black; AC-N White; PE Green	LED+ Red; LED- Black	LED+ Red; LED-1 Black; LED-2 Pink	DIM+ Purple; DIM- Pink; +12V Black & White
Color (EU-Standard)	AC-L Brown; AC-N Blue; PE Yellow & Green	LED+ Brown; LED- Blue	LED+ Brown; LED-1 Blue; LED-2 Black	
Length	300 \pm 10mm (L1)	200 \pm 8mm (L2)	200 \pm 8mm (L2)	280 \pm 8mm (L3) 200 \pm 8mm (L4)
Peeled	40 \pm 4mm (X1)	35 \pm 4mm (X2)	35 \pm 4mm (X2)	40 \pm 4mm (X3/X4)
Tinned	10 \pm 1.5mm (Y1)	10 \pm 1.5mm (Y2)	10 \pm 1.5mm (Y2)	10 \pm 1.5mm (Y3/Y4)

Appearance and Dimensions

Description	Symbol	Unit (mm)
Casing Diameter	A	$\Phi 127.5 \pm 0.5$
Diameter of Fixed Screw Hole	4-B	$\Phi 6.3 \pm 0.2$
Diameter of Assembly Hole	W	113 ± 0.5
Ring's Hole	Z	M10*1.5
Casing Height	H	58.6 ± 0.5

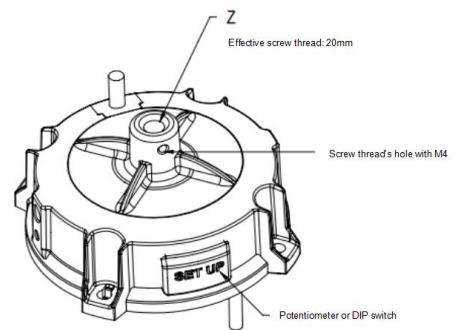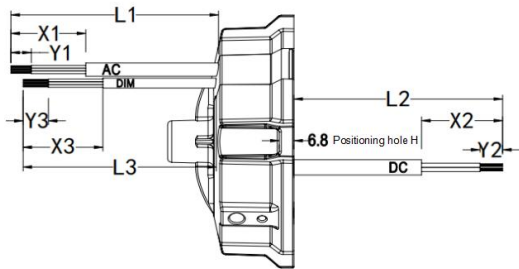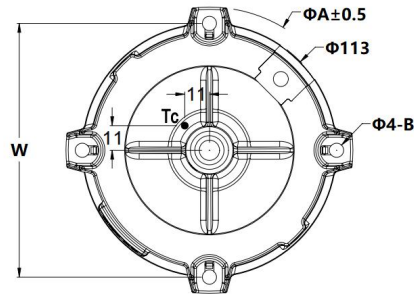

The dimming wire is at the top of LED driver

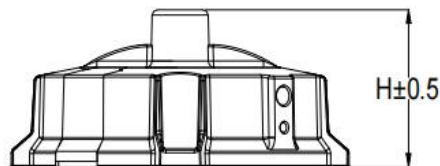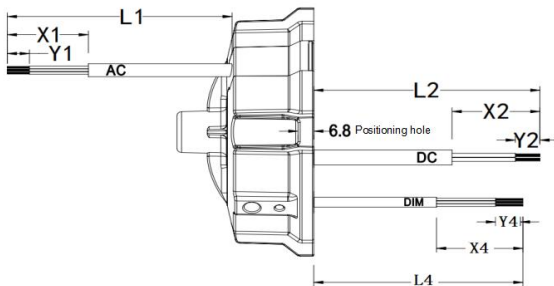

The dimming wire is at the bottom of LED driver

■ Packaging Specifications

Model	LF-FHB150YA/YB/YCIV 5
Carton Size	570*380*160 mm (L*W*H)
Quantity	15 pcs/layer; 1 layer/ctn; 15 pcs/ctn
Weight	0.65±0.1 kg/pc; 11.7±1.5 kg/ctn

■ Transportation and Storage

1. Transportation

- Suitable transportation means: vehicles, boats and aeroplanes.
- In transit, it is necessary to prepare awnings for rain or sun protection. Moreover, please keep civilized loading and unloading to prevent the vibration or impact of LED driver as much as possible.

2. Storage

- The storage of LED driver shall conform to the standard of Class I environment. When using LED drivers which have been stored for more than 6 months, please re-test them firstly. Do not use them unless they are tested to be qualified.

Cautions

- Please use Lifud LED driver according to its parameters in the specification, otherwise the LED driver may malfunction.
- Using any incompatible light fixtures or those that have not been certified may cause fire, explosion or other risks.
- Man-made damage is beyond the scope of Lifud warranty service.

Remark: Lifud Tecnology Co., Ltd. reserves the right to interpret any contents of this specification.